


HOT AIR LEVELING (HAL) RED MASKING TAPE

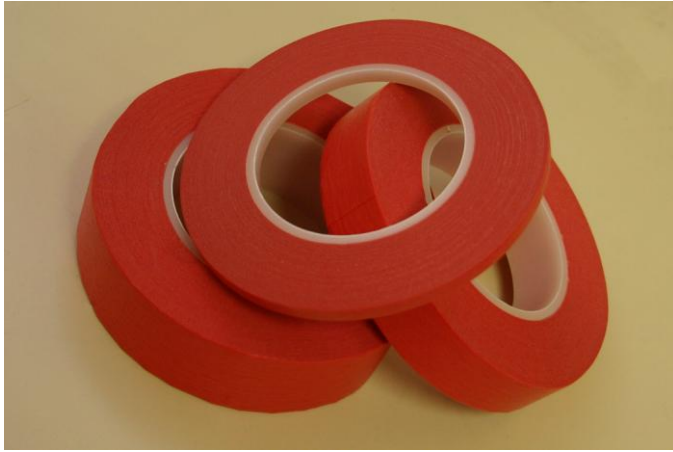

Tape No: 1-505RED-S Hot Air Leveling (HAL) Red Masking Tape

Features:

- Better grade for good conformability
- For the PC Board / High-Temperature Painting Industry
- Used to protect gold finger contacts during the hot air leveling/wave soldering process
- Excellent temperature resistance about 250°C for 5 seconds
- No adhesive transfer even when there is a long delay between wave soldering and tape removal

Technical Data:

Backing:	PET + Crepe Paper
Backing Thickness (mil / mm):	1+6 / (0.025+0.15)
Total Thickness (mil / mm):	11 / 0.275
Adhesion Type:	Silicone
Adhesion to Steel (gm / 25mm):	1350
Color:	Red
Tensile Strength (kg / 25mm):	25
Elongation (%):	5
Temperature Range:	250° (482°) x 5 Sec.

Size:

Tape Length (Yds):	36
Tape Width (in):	.5, .75", 1", 1.5", 2", cut to size

NOTE: The above data should be considered representative only and should not be used for specification purposes.

The above mentioned data represent the average obtained in our laboratory. Suggestion for use and final results on our best technical experiences but cannot be intended as our commitment or liability. The user will determine the suitability of the product and the method of application for each specific use.